



PRINT THIS PAGE

3000 rpm 50 Hz – cos φ 0,8 230V – 400/230V 3600 rpm 60 Hz – cos φ 0,8 voltage on request

SINTEL SERIES

GASOLINE Air Cooled

POWERED by HONDA



STANDARD EQUIPMENT

- Soundproof canopy
- Exhaust gas silencer
- Air filter
- Fuel tank
- Key start switch
- Distribution panel with output sockets with circuit breaker, 0,03 A ELCB optional
- 12V Battery

SINTEL SERIES


MODEL	kVA max		kVA cont		Starting	Brand		Cylinder	cm3	Hp (max) 3600	Cons. 75%(h/l)	Standard panel							
	50 Hz	60 Hz	L	W										H	Kg	LWA (*)			
SINGLE-PHASE																			
H5000SS	4,5	4,1	5,4	5	E	Honda	GX270	1	20	9	1,5	QM132	ACP0411	7	94	51	55	106	88
H8000SS	7.2	6.5	8	7.2	E	Honda	GX390	1	389	13	1.9	QM133	ACP 0411	15	110	54	65	140	88
H13000SS	11	10	--	--	E	Honda	GX630	2	688	20.8	4	QM107	ACP 0411	20	107	56	93	190	88
H15000SS	13	12	--	--	E	Honda	GX690	2	688	22.1	7	QM107	ACP 0411	20	107	56	93	210	88
THREE-PHASE																			
H8000TSS	7.5	6.8	8.3	7.5	E	Honda	GX390	1	389	13	1.9	QM330	ACP 0411	15	110	54	65	140	88
H13000TSS	11	10	--	--	E	Honda	GX630	2	688	20.8	4	QM307	ACP 0411	20	107	56	93	190	88

H15000TSS	13	12	--	--	E	Honda	GX690	2	688	22.1	7	QM307	ACP 0411	20	107	56	93	210	88
-----------	----	----	----	----	---	-------	-------	---	-----	------	---	-------	----------	----	-----	----	----	-----	----

Edit Table

Legend: (*) = Tested value; noise level compliant with European regulation 2000/14/CE

> CONTROL PANEL

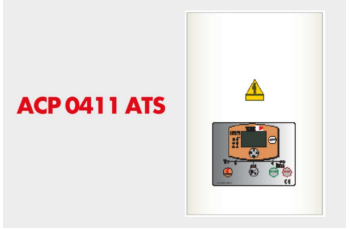

TECNOGEN S.p.A.

Strada per Ponte Riglio, 25
29010 Pontenure (Piacenza) Italy

P.IVA/CF 01126350337

ITALY SALES DEPARTMENT

Tel: +39 0523 512401
Fax: +39 0523 504453
E mail: italy@tecnogen.com

EXPORT DEPARTMENT

Tel: +39 0523 512440 Fax: +39 0523 504453
E mail: export@tecnogen.com