

PRINT THIS PAGE

1500 rpm 50 Hz - cos φ 0,8 400/230V 1800 rpm 60 Hz - cos φ 0,8 voltage on request



>SS SOUNDPROOF SERIES



>OPEN SKID SERIES




STANDARD EQUIPMENT

- Robust steel base-frame
- Integrated fuel tank
- Fuel tank bunding for K version
- Exhaust gas silencer
- Battery 12V or 24V
- Control panel
- Circuit breaker
- Emergency stop button
- Soundproof canopy (SS models only) with residential silencer

DIESEL Water Cooled

> ALTERNATORS




TENAX-JOHN DEERE | OPEN SKID SERIES

MODEL	kVA LTP	kVA PRP	kVA LTP	kVA PRP	Engine	Regulator	Cylinder	cm ³	kWm 1500 rpm	kWm 1800 rpm	(l/h) 1500 rpm	(l/h) 1800 rpm	Aspiration	Standard panel	Automatic panel	Tank l	L	W	H	Kg	
			50 Hz	60 Hz							Cons. 70%	Cons. 70%									
THREE- PHASE																					
JD35TK	32	28	34	31	3029DFU29	M	3	2900	25	28	4,4	5,6	N	AUS6110-02	ACP 0411	120	170	95	140	670	
JD51TK	44	40	50	45	3029TFU29	M	3	2900	36	40	6,7	7,6	T	AUS6110-02	ACP 0411	120	170	95	140	765	





JD72TK	75	68	84	75	4045TF158	M	4	4500	72	80	10.6	12	T	AUS6110-02	ACP 6120	120	188	100	145	950
JD90TK	88	80	99	88	4045TF258	M	4	4500	72	80	14.5	14	T	AUS6110-02	ACP 6120	200	210	110	160	1035
JD110TK	110	100	135	123	4045HF158	M	4	4500	88	108	14.7	18.8	T	AUS6110-02	ACP 6120	200	210	110	160	1170
JD120TK	115	105	135	123	6068TF158	M	6	6800	91.5	108	15.3	18.3	T	AUS6110-02	ACP 6120	200	250	113	165	1310
JD130TK	132	120	154	140	6068TF258	M	6	6800	105	122	18.2	22.1	T	AUS6110-02	ACP 6120	200	250	113	165	1395
JD170TK	165	150	209	190	6068HF158	M	6	6800	134	161	22.6	28.6	T	AUS6110-02	ACP 6120	230	250	113	165	1440
JD200TV	200	180	230	205	6068HF258	M	6	6800	160	179	27.3	31.6	T	AUS 7310	ACP 7320	230	245	80	165	1520
JD221TV	220	200	231	210	6068HFU74	E	6	6800	177.6	180.5	29.5	32.8	T	AUS 7310	ACP 7320	240	239	77	192	1900
JD277TV	275	250	280	255	6068HFU55	E	6	6800	216	218.5	35.7	37.7	T	AUS 7310	ACP 7320	300	250	110	177	2130

Edit Table

Legend: N= natural T= turbo (*) = Noise level compliant with European regulation 2000/14/CE for SS Models only



TENAX-JOHN DEERE | SS SOUNDPROOF SERIES

MODEL	kVA LTP	kVA PRP	kVA LTP	kVA PRP	 Engine	Regulator	Cylinder	cm3	kWm 1500 rpm	kWm 1800 rpm	(l/h) 1500 rpm	(l/h) 1800 rpm	Aspiration	Standard panel	Automatic panel	dB(A) (*) 7 m					
50 Hz		60 Hz		Engine						Cons. 70%		Cons. 70%				Tank I		L	W	H	Kg
THREE- PHASE																					
JD35TK SS	32	28	34	31	3029DFU29	M	3	2900	25	28	4,4	5,6	N	AUS6110-02	ACP 0411	67	120	200	95	150	900
JD51TK SS	44	40	50	45	3029TFU29	M	3	2900	36	40	6,7	7,6	T	AUS6110-02	ACP 0411	67	120	200	95	150	1000
JD72TK SS	75	68	84	75	4045TF158	M	4	4500	60.5	71	10.6	12	T	AUS6110-02	ACP 6120	67	120	228	100	160	1260
JD90TK SS	88	80	99	88	4045TF258	M	4	4500	72	80	14.5	14	T	AUS6110-02	ACP 6120	67	200	255	113	170	1520
JD110TK SS	110	100	135	123	4045HF158	M	4	4500	88	108	14.7	18.8	T	AUS6110-02	ACP 6120	69	200	255	113	170	1545
JD120TK SS	115	105	135	123	6068TF158	M	6	6800	91.5	108	15.3	18.3	T	AUS6110-02	ACP 6120	70	200	300	113	185	1700
JD130TK SS	132	120	154	140	6068TF258	M	6	6800	105	122	18.2	22.1	T	AUS6110-02	ACP 6120	70	200	300	113	185	1750
JD170TK SS	165	150	209	190	6068HF158	M	6	6800	134	161	22.6	28.6	T	AUS6110-02	ACP 6120	70	230	300	113	185	1860
JD200TV SS	200	180	230	205	6068HF258	M	6	6800	160	179	27.3	31.6	T	AUS 7310	ACP 7320	70	230	300	113	165	1980
JD221TV SS	220	200	231	210	6068HFU74	E	6	6800	177.6	180.5	29.5	32.8	T	AUS 7310	ACP 7320	70	300	363	123	201	2460
JD277TV SS	275	250	280	255	6068HFU55	E	6	6800	216	218.5	35.7	37.7	T	AUS 7310	ACP 7320	70	310	383	123	201	2800

Edit Table

Legend: N= natural T= turbo (*) = Noise level compliant with European regulation 2000/14/CE for SS Models only



HOT GALVANIZED STEEL SOUNDPROOF CANOPY

> CONTROL PANEL


AUS 7310




AUS 6110-02




ACP 6120 AMF



ACP 6120 STS

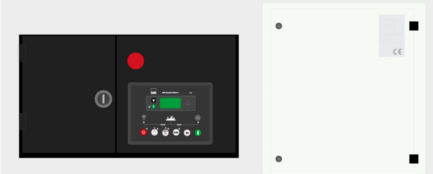

ACP 6120 ATS




ACP 7320 AMF



ACP 7320 ATS



ACP 0411 ATS



TECNOGEN S.p.A.

Strada per Ponte Riglio, 25
29010 Pontenure (Piacenza) Italy

P.IVA/CF 01126350337

ITALY SALES DEPARTMENT

Tel: +39 0523 512401

Fax: +39 0523 504453

E mail: italy@tecnogen.com

EXPORT DEPARTMENT

Tel: +39 0523 512440 Fax: +39 0523 504453

E mail: export@tecnogen.com