

PRINT THIS PAGE

1500 rpm 50 Hz - cos ϕ 0,8 400/230V 1800 rpm 60 Hz - cos ϕ 0,8 voltage on request



>SS SOUNDPROOF SERIES



STANDARD EQUIPMENT

- Robust steel base-frame
- Integrated fuel tank
- Fuel tank bunding for K version
- Exhaust gas silencer
- Battery 12V
- Control panel
- Circuit breaker
- Emergency stop button
- Soundproof canopy (SS models only) with residential silencer


DIESEL Water Cooled

>OPEN SKID SERIES



> ALTERNATORS






TENAX-MITSUBISHI | OPEN SKID SERIES

MODEL	kVA LTP		kVA PRP		Engine	Regulator	Cylinder	cm ³	kWm 1500 rpm	kWm 1800 rpm	(l/h) 1500 rpm	(l/h) 1800 rpm	Aspiration	Standard control panel	Optional Autostart Control Panel	Automatic Control Panel	Tank l	Dimensions (mm)				Kg
	50 Hz	60 Hz	50 Hz	60 Hz														Cons. 70%	Cons. 70%	L	W	
SINGLE-PHASE																						
MI8MC*	7	6.3	8.8	8	L3E SD	M	3	952	6.2	7.8	1.5	1.8	N	AUS6110-01	AUS6110-13	ACP 0411	50	116	73	100	320	
MI12MC*	11	10	13.2	12	S3L2 SD	M	3	1318	9.7	11.8	2.1	2.5	N	AUS6110-01	AUS6110-17	ACP 0411	50	116	73	100	435	
MI17MC*	14.8	13.5	18.8	17	S4L2 SD	M	4	1758	13.7	16.2	2.8	3.4	N	AUS6110-01	AUS6110-17	ACP 0411	50	148	73	115	445	
MI23MC*	21	19	25.3	23	S4Q2 SD	M	4	2505	19.6	22.8	4	4.8	N	AUS6110-01	AUS6110-17	ACP 6120	50	148	73	115	500	
THREE-PHASE																						
MI8TC*	7.5	6.5	8.8	8	L3E SD	M	3	952	6.2	7.8	1.5	1.8	N	AUS6110-01	AUS6110-14	ACP 0411	50	115	73	100	300	
MI12TC*	11.5	10.5	14.2	12.9	S3L2 SD	M	3	1318	9.7	11.8	2	2.5	N	AUS6110-01	AUS6110-14	ACP 0411	50	140	73	100	375	
MI17TC*	16.5	15	19.8	18	S4L2 SD	M	4	1758	13.7	16.2	2.9	3.5	N	AUS6110-01	AUS6110-15	ACP 0411	50	140	73	105	400	
MI23TC*	22	20	28	25.5	S4Q2 SD	M	4	2505	19.6	22.8	4	5	N	AUS6110-01	AUS6110-15	ACP 0411	50	140	73	105	460	
SINGLE-PHASE																						
MI8MK*	7	6.3	8.8	8	L3E SD	M	3	952	6.2	7.8	1.5	1.8	N	AUS6110-02	AUS6110-13	ACP 0411	80	120	75	105	330	
MI12MK*	11	10	13.2	12	S3L2 SD	M	3	1318	9.7	11.8	2.1	2.5	N	AUS6110-02	AUS6110-17	ACP 0411	80	150	75	125	450	
MI17MK*	14.8	13.5	18.8	17	S4L2 SD	M	4	1758	13.7	16.2	2.8	3.4	N	AUS6110-02	AUS6110-17	ACP 0411	80	150	75	125	460	
MI23MK*	21	19	25.3	23	S4Q2 SD	M	4	2505	19.6	22.8	4	4.8	N	AUS6110-02	AUS6110-17	ACP 6120	80	150	75	125	515	
THREE-PHASE																						
MI12TK*	11.5	10.5	14.2	12.9	S3L2 SD	M	3	1318	9.7	11.8	2	2.5	N	AUS6110-02	AUS6110-14	ACP 0411	80	150	75	125	400	
MI17TK*	16.5	15	19.8	18	S4L2 SD	M	4	1758	13.7	16.2	2.9	3.5	N	AUS6110-02	AUS6110-15	ACP 0411	80	150	75	125	420	
MI23TK*	22	20	28	25.5	S4Q2 SD	M	4	2505	19.6	22.8	4	5	N	AUS6110-02	AUS6110-15	ACP 0411	80	150	75	125	480	
MI35TK*	33	30	39	36	S4S SD	M	4	3331	27.5	33.4	5.9	6.9	N	AUS6110-02	--	ACP 0411	120	170	95	140	600	
MI45TK*	42	40	54	49	S4S DT SD	M	4	3331	36.7	43.7	7.1	8.6	T	AUS6110-02	--	ACP 0411	120	170	95	140	645	
MI65TK	65	60	--	--	4EG-TA61SDK	M	4	3331	52.8	---	9.1	---	T	AUS6110-02	--	ACP 6120	120	188	100	145	930	

Edit Table

Legend: N= natural T= turbo (*) = Noise level compliant with European regulation 2000/14/CE for SS Models only

Legend: N= natural T= turbo (*) = Noise level compliant with European regulation 2000/14/CE



TENAX-MITSUBISHI | SS SOUNDPROOF SERIES

MODEL	kVA LTP		kVA PRP		Engine	Regulator	Cylinder	cm ³	kWm 1500 rpm	kWm 1800 rpm	(l/h) 1500 rpm	(l/h) 1800 rpm	Aspiration	Standard panel	Optional	dB(A) (*) 7 m	Tank l	Dimensions (mm)				Kg
	50 Hz	60 Hz	50 Hz	60 Hz														Cons. 70%	Cons. 70%	L	W	
SINGLE-PHASE																						
MI8MC SS*	7	6.3	8.8	8	L3E SD	M	3	952	6.2	7.8	1.5	1.8	N	AUS6110-01	AUS6110-13	ACP 0411	65	50	108	70	99	435
MI12MC SS*	11	10	13.2	12	S3L2 SD	M	3	1318	9.7	11.8	2.1	2.5	N	AUS6110-01	AUS6110-17	ACP 0411	65	50	175	77	107	550

MI17MC SS*	14.8	13.5	18.8	17	S4L2 SD	M	4	1758	13.7	16.2	2.8	3.4	N	AUS6110-01	AUS6110-17	ACP 0411	65	50	175	77	107	560
MI23MC SS*	21	19	25.3	23	S4Q2 SD	M	4	2505	19.6	22.8	4	4.8	N	AUS6110-01	AUS6110-17	ACP 6120	65	50	175	77	107	615
THREE-PHASE																						
MI8TC SS*	7.5	6.5	8.8	8	L3E SD	M	3	952	6.2	7.8	1.5	1.8	N	AUS6110-01	AUS6110-14	ACP 0411	65	50	108	70	99	415
MI12TC SS*	11.5	10.5	14.2	12.9	S3L2 SD	M	3	1318	9.7	11.8	2	2.5	N	AUS6110-01	AUS6110-14	ACP 0411	65	50	175	77	107	490
MI17TC SS*	16.5	15	19.8	18	S4L2 SD	M	4	1758	13.7	16.2	2.9	3.5	N	AUS6110-01	AUS6110-15	ACP 0411	65	50	175	77	107	515
MI23TC SS*	22	20	28	25.5	S4Q2 SD	M	4	2505	19.6	22.8	4	5	N	AUS6110-01	AUS6110-15	ACP 0411	65	50	175	77	107	575
SINGLE-PHASE																						
MI8MK SS*	7	6.3	8.8	8	L3E SD	M	3	952	6.2	7.8	1.5	1.8	N	AUS6110-02	AUS6110-13	ACP 0411	65	80	145	75	120	450
MI12MK SS*	11	10	13.2	12	S3L2 SD	M	3	1318	9.7	11.8	2.1	2.5	N	AUS6110-02	AUS6110-17	ACP 0411	65	80	175	75	140	570
MI17MK SS*	14.8	13.5	18.8	17	S4L2 SD	M	4	1758	13.7	16.2	2.8	3.4	N	AUS6110-02	AUS6110-17	ACP 0411	65	80	175	75	140	580
MI23MK SS*	21	19	25.3	23	S4Q2 SD	M	4	2505	19.6	22.8	4	4.8	N	AUS6110-02	AUS6110-17	ACP 6120	65	80	175	75	140	630
THREE-PHASE																						
MI8TK SS*	7.5	6.5	8.8	8	L3E SD	M	3	952	6.2	7.8	1.5	1.8	N	AUS6110-02	AUS6110-14	ACP 0411	65	80	145	75	120	425
MI12TK SS*	11.5	10.5	14.2	12.9	S3L2 SD	M	3	1318	9.7	11.8	2	2.5	N	AUS6110-02	AUS6110-14	ACP 0411	65	80	175	75	140	530
MI17TK SS*	16.5	15	19.8	18	S4L2 SD	M	4	1758	13.7	16.2	2.9	3.5	N	AUS6110-02	AUS6110-15	ACP 0411	65	80	175	75	140	545
MI23TK SS*	22	20	28	25.5	S4Q2 SD	M	4	2505	19.6	22.8	4	5	N	AUS6110-02	AUS6110-15	ACP 0411	65	80	175	75	140	590
MI35TK SS*	33	30	39	36	S4S SD	M	4	3331	27.5	33.4	5.9	6.9	N	AUS6110-02	---	ACP 0411	67	120	200	95	150	845
MI45TK SS*	42	40	54	49	S4S DT SD	M	4	3331	36.7	43.7	7.1	8.6	T	AUS6110-02	---	ACP 0411	67	120	200	95	150	905
MI65TK SS	65	60	--	--	4EG-TA615DK	M	4	3331	52.8	--	9.1	--	T	AUS6110-02	---	ACP 6120	67	120	228	100	160	1190

Edit Table


Legend: **N**= natural **T**= turbo **(*)** = Noise level compliant with European regulation 2000/14/CE for SS Models only




HOT GALVANIZED STEEL SOUNDPROOF CANOPY

> CONTROL PANEL


AUS 6110-02




ACP 6120 AMF




ACP 6120 ATS




ACP 7320 STS

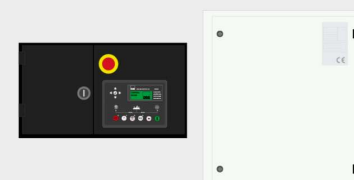

AUS 6110 -13



AUS 6110 -14




AUS 6110 -15



AUS 6110 -17



ACP 0411 ATS



TECNOGEN S.p.A.

Strada per Ponte Riglio, 25
29010 Pontenure (Piacenza) Italy

P.IVA/CF 01126350337

ITALY SALES DEPARTMENT

Tel: +39 0523 512401

Fax: +39 0523 504453

E mail: italy@tecnogen.com

EXPORT DEPARTMENT

Tel: +39 0523 512440 Fax: +39 0523 504453

E mail: export@tecnogen.com