

PRINT THIS PAGE

XT

1500 rpm 50 Hz – cos ϕ 0,8 400/230 V 1800 rpm 60 Hz – cos ϕ 0,8 voltage on request

MANUAL DEPLOYMENT

4 or 6 x1000W adjustable
HALOGEN spotlights







STANDARD EQUIPMENT

- ENERMAX series generating sets
- Manual mast in galvanized steel (max height 7/9 m)
- 4 or 6 x1000 W halogen spotlights
- Low speed trailer
- 4 stabilising feet separately adjustable
- Connection cable spotlights/generating set


>ENGINE



MODEL	KVA LTP	KVA PRP	KVA LTP	KVA PRP		Cylinder	cm3	kWm 1500 rpm	kWm 1800 rpm	(l/h) 1500 rpm	(l/h) 1800 rpm	dB(A) (+) 7 m				H MAX cm	LUMEN TOT	Standard panel		
50 Hz		60 Hz		Engine						Cons. 70%	Cons. 70%	Tank l		L	W	H	Kg			
THREE - PHASE																				
PK 15 TXT**	14.5	13	17	15.5	PERKINS 403D-15G	3	1496	12	14.4	2.6	3	65	70	343	123	167	720	700	80000	AUS 6110-19
PK 23 TXT**	22	20	26.5	24	PERKINS 404D-22G	4	2216	18.4	21.6	3.7	4.3	65	70	343	123	167	750	700	80000	AUS 6110-19
PK 36 TXT	33	30	40	36	PERKINS 1103A-33G	3	3300	27.7	32.2	4.8	6	67	135	350	145	202	1250	900	80000	AUS 6110-19
PK 51 TXT	50	45	60	54	PERKINS 1103A-33TG1	3	3300	41.3	48.9	7.4	9	67	185	390	175	290	1050	1050	80000	AUS 6110-19

Legend: Name** engine emissions compliant Eu stage III A

> CONTROL PANEL

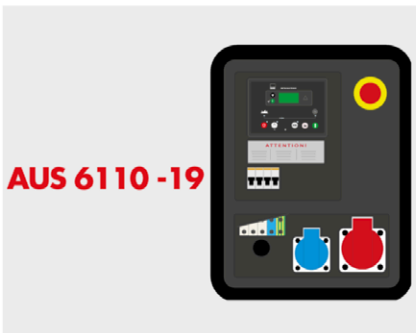

TECNOGEN S.p.A.

Strada per Ponte Riglio, 25
29010 Pontenure (Piacenza) Italy

P.IVA/CF 01126350337

ITALY SALES DEPARTMENT

Tel: +39 0523 512401

Fax: +39 0523 504453

E mail: italy@tecnogen.com

EXPORT DEPARTMENT

Tel: +39 0523 512440 Fax: +39 0523 504453

E mail: export@tecnogen.com

